

## Mini Goose Nech Microphone for Hands-Free Installations

### DESCRIPTION

- > Ensures optimum signal to noise ratio.
- > Quick and simple mounting and connection.
- > Also available in grey colour
- > Can be bent over and over again without weakening of the ability of keeping position.
- > High-sensitivity built-in electret cartridge with amplifier.
- > Voltage supply 9 - 15 V DC when connected as shown in the diagram below.
- > Supplied with 4 m cable.



### SPECIFICATIONS

Electrical	
Model	DM 8320
Type	Goose neck microphone
Pattern Type	Non-directional
Impedance	1 k $\Omega$
Frequency Response	Shown in diagram below
Power Supply	Nominal : 2 V. (Max. 10 V)
Current Consumption	Approx. 0.5 mA
Sensitivity	-46 dB $\pm$ 3 dB at 1 kHz rel. 1 V/Pa


Mechanical	
Cartridge Type	Electret
Materials	Aluminium and ABS
Cable	4 m 1-wire with shield
Dimensions	Approx. 180 mm / 7.09 in.
Weight	Approx. 0.075 kg / 0.17 lb.

Environmental	
Operating Temperature Range	-25 $^{\circ}$ C to +55 $^{\circ}$ C
Storage Temperature Range	-40 $^{\circ}$ C to +55 $^{\circ}$ C

### ORDERING

Model	Product No.
DM 8320	270000036

### TYPICAL RESPONSE CURVE

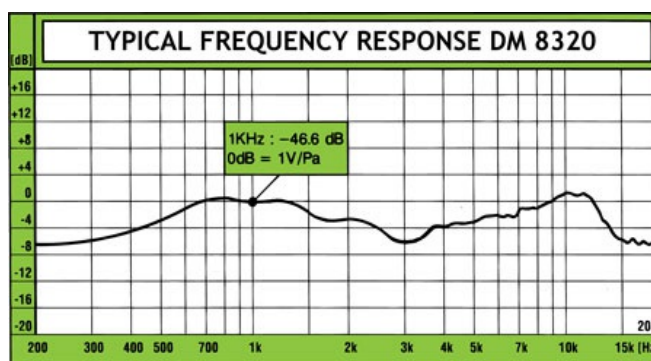

### WIRE DIAGRAM

